


Company	
Compiled by	
Date	

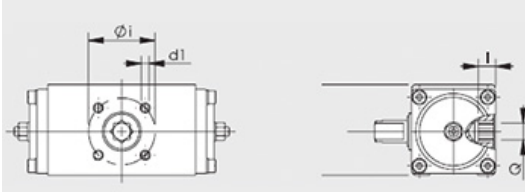

YOU'RE REQUIRED TO FILL IN AT LEAST ONE OUT OF THE TWO SECTIONS

ACTUATOR

Rotation angle (°) 90° standard, different angles available on request																						
Torque (Nm)																						
Actuator type	<input type="checkbox"/> Single acting <input type="checkbox"/> Double acting																					
Flange and power takeoff dimensions (standard star type)																						
 <table border="1" data-bbox="638 1142 989 1344"> <thead> <tr> <th>FLANGE ISO 5211</th> <th>Ø i</th> <th>d1</th> </tr> </thead> <tbody> <tr> <td>F03</td> <td>36</td> <td>M5 depth 8</td> </tr> <tr> <td>F04</td> <td>42</td> <td>M5 depth 8</td> </tr> <tr> <td>F05</td> <td>50</td> <td>M6 depth 9</td> </tr> <tr> <td>F07</td> <td>70</td> <td>M8 depth 12</td> </tr> <tr> <td>F10</td> <td>102</td> <td>M10 depth 15</td> </tr> <tr> <td>F12</td> <td>125</td> <td>M12 depth 18</td> </tr> </tbody> </table>	FLANGE ISO 5211	Ø i	d1	F03	36	M5 depth 8	F04	42	M5 depth 8	F05	50	M6 depth 9	F07	70	M8 depth 12	F10	102	M10 depth 15	F12	125	M12 depth 18	
FLANGE ISO 5211	Ø i	d1																				
F03	36	M5 depth 8																				
F04	42	M5 depth 8																				
F05	50	M6 depth 9																				
F07	70	M8 depth 12																				
F10	102	M10 depth 15																				
F12	125	M12 depth 18																				

Switch box	<input type="checkbox"/> Yes <input type="checkbox"/> No
Position indicator	<input type="checkbox"/> Yes <input type="checkbox"/> No
Actuator application description	
Acuator required quantity	

VALVE

Fluid	
Fluid temperature (°C)	
Ambient temperature (°C)	
Fluid pressure (bar)	
Maximum admissible pressure drop (bar)	
Required flow rate (m³/h)	
Valve type	<input type="checkbox"/> Ball 2 ways <input type="checkbox"/> Ball 3 ways L <input type="checkbox"/> Ball 3 ways T <input type="checkbox"/> Wafer <input type="checkbox"/> Butterfly
Threaded connection	
Valve application description	
Valve required quantity	