

Société	
Créé par	
Date	



YOU'RE REQUIRED TO FILL IN AT LEAST ONE OUT OF THE TWO SECTIONS

ACTUATOR


Rotation angle (°) 90° standard, different angles available on request

Torque (Nm)

Actuator type

- Single acting
 Double acting

Flange and power takeoff dimensions (standard star type)

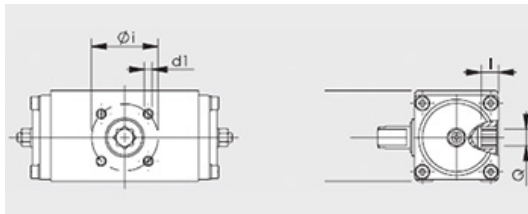

FLANGE ISO 5211	Ø i	d1
F03	36	M5 depth 8
F04	42	M5 depth 8
F05	50	M6 depth 9
F07	70	M8 depth 12
F10	102	M10 depth 15
F12	125	M12 depth 18

Switch box

- Oui
 Non

Position indicator

- Oui
 Non

Actuator application description

Actuator required quantity

VALVE

Fluid

Fluid temperature (°C)

Ambient temperature (°C)

Fluid pressure (bar)

Maximum admissible pressure drop (bar)

Required flow rate (m³/h)

Valve type

- Ball 2 ways
 Ball 3 ways L
 Ball 3 ways T
 Wafer
 Butterfly

Threaded connection

Valve application description

Valve required quantity